

MAXUM

Next Generation
DC Commercial Door Operator
TDC Trolley

DATA SHEET



Key Features

Standard Application

Recommended for door types including:
Sectional Doors (Standard Lift)
Standard Duty Cycle and Extended Duty Cycle Applications

Rated Duty Cycle

Standard Duty: Up to 20 cycles per hour
Extended Duty: Up to 30 cycles per hour

Operator Speed

Average 12" per second for Sectional doors

Limit Settings

Electronic limits via Floor Level Wall Controller with LCD display

Emergency Disconnect for Manual Operation

Emergency release

Emergency Disconnect with Auto - Reconnect

Reconnects when door release mechanism is reengaged

Programming

Floor Level Wall Controller with LCD display to program and commission door

Circuit Board

DC Logic Circuit Board

Timer-to-Close

Programming through menu on wall controller. Option is available in B2 Mode with two settings. User can select a desired Timer-to-Close (TTC) time duration under that menu

Mid-Stop

Program setup under System Configuration Operating Mode, Mid-stop

Battery Backup

DC7AH (2): 7 Ah batteries and mounting bracket (optional)

Cycle Limiter Protection

Auto cool-down (max. 15 minutes) triggers if the hourly cycle limit is exceeded

Motor Reverse Action Protection

Stop Fast: 250ms ramp

Stop Ramp: 500ms-2000ms; Stop button while opening

Emergency (Safety-Chain): CTM trigger immediate stop

Motor Operator Wall Controller

Floor Level Wall Controller with LCD screen using 2 wire interface to connect to powerhead

Trolley Track

Dual L-Rail Trolley Track

MAXUM

DATA SHEET

Next Generation
DC Commercial Door Operator
TDC Trolley

Specifications

Radio Receiver	LiftMaster Security+ 2.0
Voltage Connections	120Vac 1 PH/240Vac 1/3PH; 480Vac 3PH; 208Vac 3PH (via transformer); 600Vac 3PH (via transformer)
Accessory Power	24Vdc, 1A Auxiliary Output
Drive Reduction	65:1 Gearbox with #48 Chain Output on 700 units and #41 Chain Output on 1200 and 2200 units
Brake	Dynamic braking standard on all Maxum operators. 2200 series operators include eletromechanical holding brake.
Construction	NEMA 1 type electrical box, heavy duty 11 gauge steel frame with durable powder coat finish. NEMA 4X type electrical box for NEMA 4X rated units
Warranty	5 Years Limited Warranty Battery Backup Kit - 1 Year LCD Wall Control - 2 Years Photoeyes - 1 Year Replacement Parts - 1 Year MAXUM Operator Standard Duty - 5 YEARS / 85,000 Cycles* Extended Duty - 5 YEARS / 130,000 Cycles*

Installation Features

Maximum Door Weight	See SKU listing below for maximum door weights allowable by SKU
---------------------	---

Connectivity

Wi-Fi®	Connect to Wi-Fi via Connectivity option on the wall controller
Internet Connectivity	myQ® technology enables remote monitoring and control via smartphone, tablet, computer. myQ Facility technology enables Diagnostics, absolute cycle count, service cycle count, and remote management

Door Weight Chart

SKU	Description	Max Door Weight
TDC7S1BMC	TDC TROLLEY 700LB STD CYCLE 120/240V BBU CAPABLE	700 lb.
TDC7S4BMC	TDC TROLLEY 700LB STD CYCLE 480V BBU CAPABLE	700 lb.
TDC12S1BMC	TDC TROLLEY 1200LB STD CYCLE 120/240V BBU CAPABLE	1200 lb.
TDC12S4BMC	TDC TROLLEY 1200LB STD CYCLE 480V BBU CAPABLE	1200 lb.
TDC12X1BMC	TDC TROLLEY 1200LB EXT CYCLE 120/240V BBU CAPABLE	1200 lb.
TDC12X4BMC	TDC TROLLEY 1200LB EXT CYCLE 480V BBU CAPABLE	1200 lb.
TDC22X1BMC	TDC TROLLEY 2200LB EXT CYCLE 120/240V BBU CAPABLE	2200 lb.
TDC22X4BMC	TDC TROLLEY 2200LB EXT CYCLE 480V BBU CAPABLE	2200 lb.
JHDC22X1BMC	JHDC HOIST 3IN 2200LB EXT CYCLE 120/240V BBU CAPABLE	2200 lb.
JHDC22X4BMC	JHDC HOIST 3IN 2200LB EXT CYCLE 480V BBU CAPABLE	2200 lb.


MAXUM

Next Generation
DC Commercial Door Operator
TDC Trolley





DATA SHEET

Dimensions

Dimensions	A	B
700 lb. Operators	18.6"	21.1"
1200 lb. Operators	18.9"	21.4"



TDC7 & TDC12 MODELS

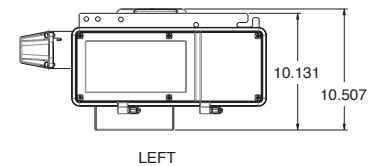

TDC22 MODELS

