

WIRED KEYPAD AND PROXIMITY READER KPR2000

SECTION 28 13 00



KEY FEATURES

UNIT INTERFACE CAPABILITIES	Card/PIN
STAND ALONE	Yes

SPECIFICATIONS

POWER SUPPLY	12VDC (not included in carton)
PROGRAMMING (DATABASE MANAGEMENT)	Keypad
WIEGAND OUTPUT DATA FORMAT	26 and 30 Bit
LOCAL USER CAPACITY	2000
MAX NUMBER OF GATES/DOORS OF CONTROL (EACH)	1
RELAY OUTPUT	1
MOUNTING OPTIONS	Surface/gooseneck
OPERATING TEMPERATURE	-4°F to 140°F (-20°C to 60°C)
CAMERA READY	No
ANTI-TAMPER ALARM	Yes
WARRANTY	1 year

CONSTRUCTION

ENCLOSURE MATERIAL	Zinc-alloy
---------------------------	------------


DATA SHEET
WIRED KEYPAD AND
PROXIMITY READER

WIRED KEYPAD AND PROXIMITY READER

KPR2000

SECTION 28 13 00

DIMENSIONS

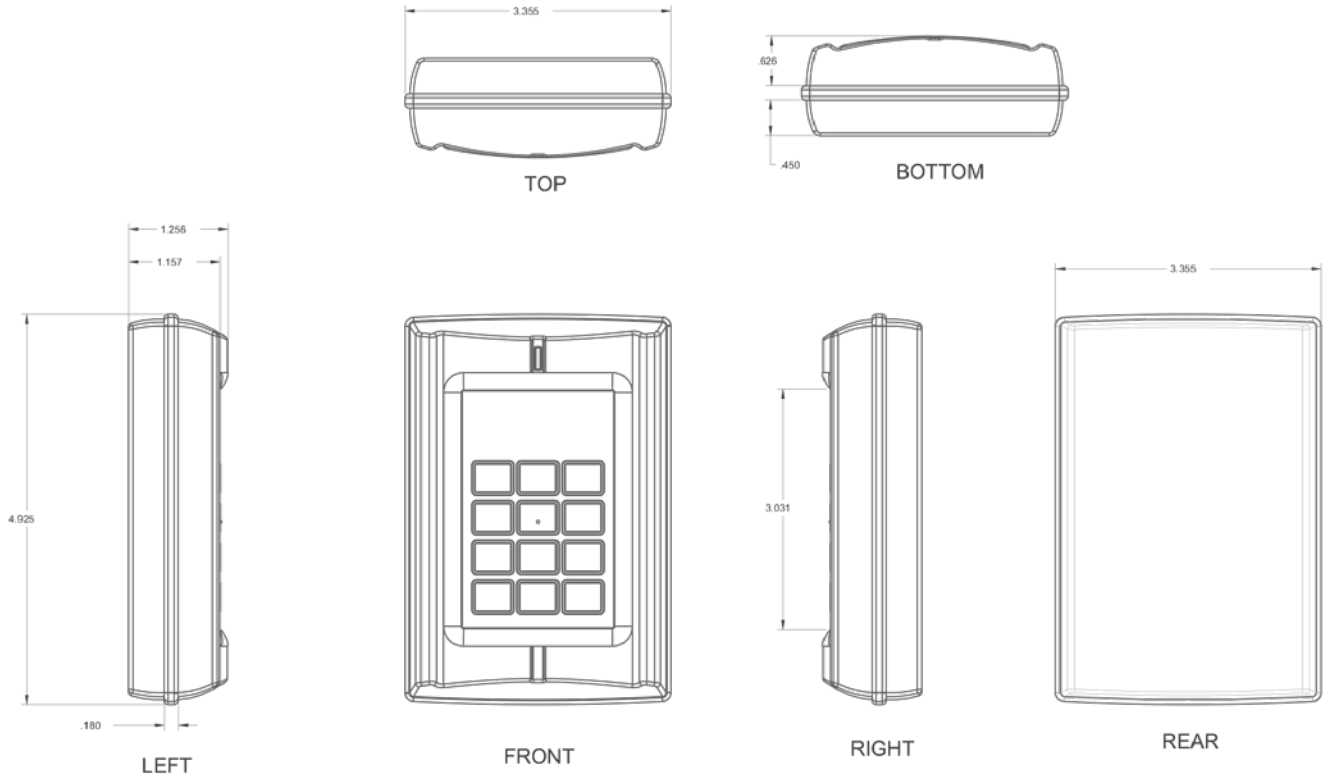

RANGE

KPR2000 Feature	Wired	Wire type	Range
Power 120VAC to 16VDC transformer (from outlet to controller)	x	2 wire (14 AWG) 2 wire (16 AWG) 2 wire (18 AWG)	Up to 300 ft. Up to 200 ft. Up to 100 ft.
Relay output wiring	x	2 wire (18-24 AWG)	Up to 2500 ft.
Wiegand output	x	7 wire (22 AWG)	Up to 500 ft.